Step Lite Square

Cat. No. SLSQ Cat. No. SLSQGU






The Step Lite Square is designed with a 88mm x 88mm (3½" x 3½") flange for flush mounting into masonry, stone or wood. This luminaire is ideal for illumination of steps and ground level horizontal lighting, for example, across driveways or exterior paved areas. When a canister is used there are no mounting holes in the flange.

A GU10 version of this luminaire is also available for line voltage lamps. However, a longer luminaire body is needed to accommodate the longer lamp.

7mm 1/4" 68.5mm - 2³/4" - 63.5mm 2½" - 11" 25mm

Ordering Information

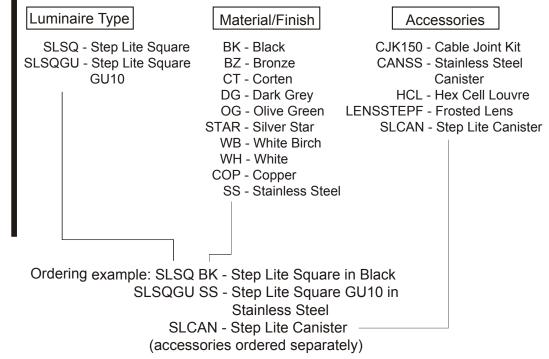

© 2016 Hunza Holdings Ltd.

Luminaire Construction

CNC machined from one of the following metals:

Aluminium

High corrosion resistant aluminium with chromate substrate and high UV resistant polyester powder coat.

Body: 63.5mm (2½") x 10mm (3/8"). aluminium tube.

End cap: solid aluminium 63.5mm (2½")

rod.

Flange: 90mm x 90mm (3½" x 3½") solid

aluminium square bar.

Colours:

Black, Bronze, Corten, Dark Grey, Olive Green, Silver Star, White Birch, White.

Copper

Body: 63.5mm (2½") x 10mm (3/8")

copper tube.

End cap: solid copper 63.5mm (2½") rod. Flange: 90mm x 90mm (3½" x 3½") solid

copper square bar.

316 Stainless Steel

Body: 63.5mm (2½") x 10mm (3/8")

stainless steel tube.

End cap: solid stainless steel 63.5mm

 $(2\frac{1}{2})$ rod.

Flange: 90mm x 90mm (31/2" x 31/2") solid

MR16 ESX GU5.3 🙇

MR16 FRB GU5.3 /

12 volt 35 watt 10°

(3') |

(3') |

(6')

(9"

(6')

12 volt 20 watt 10°

4000 Lux @ Ø 200mm (8")

1000 Lux @ Ø 400mm (16")

444 Lux @ Ø 600mm (24")

8000 Lux @ Ø 200mm (8")

2000 Lux @ Ø 400mm (16")

880 Lux @ Ø 600mm (24")

stainless steel square bar.

Mounting

Designed to fit through a 66mm (2½") hole and be fixed into position by two screws in the flange.

A Step Lite or Stainless Steel Canister (Cat. SLCAN or CANSS) can be used to maintain the aesthetic look of the flange by eliminating the two screw holes in the flange.

Features

Lens

10mm (3/8") clear flush fit shatter resistant glass.

Lifetime Warranty.

Gasket

Lamp Holder

MR16 & GU10 - 350°C (662°F) ceramic multi contact lamp holder with 250°C

Accessories

Cable Joint Kit (Cat. CJK150). Not approved for USA/Canada.

Stainless Steel Canister (Cat. CANSS).


For use in lime stone, etc.


Hex Cell Louvre (Cat. HCL).


Frosted Lens (Cat. LENSSTEPF). Step Lite Canister (Cat. SLCAN).


Silicone, iron impregnated 220°C (428°F).


(480°F) Teflon cables.

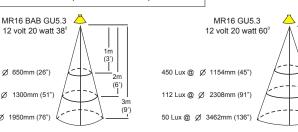

















HUNZA FACTORY 130 Felton Mathew Ave Glen Innes Auckland 1072 New Zealand

Ph: 64-9-528 9471 Fax: 64-9-528 9361 hunza@hunza.co.nz www.hunzalighting.com

INTERNATIONAL CONTACTS: http://www.hunzalighting.com/ contact.php Specification may change without notice. Manufactured in New Zealand. © 2016 Hunza Holdings Ltd.

Standards

Luminaire Weight

Power Supply

Lamp Options

EN60598, IP66, UL1838, (§)*

Aluminium - 0.465kg (1lb)

Copper - 1.340kg (2lb 15oz)

Hunza Inground or Wall Mount

Transformer: not included.

MR16 - 20 watt lamp max.

MR16 - 20 watt lamp max.

GU10 - lamp not supplied.

GU10 - 25 or 35 watt lamp max.

1m (3')

2m (6')

USA and Canada

USA and Canada

included.

Stainless Steel - 1.055kg (2lb 5oz)

Hunza Wall Mount Transformer: not