


Spike lights specification sheet

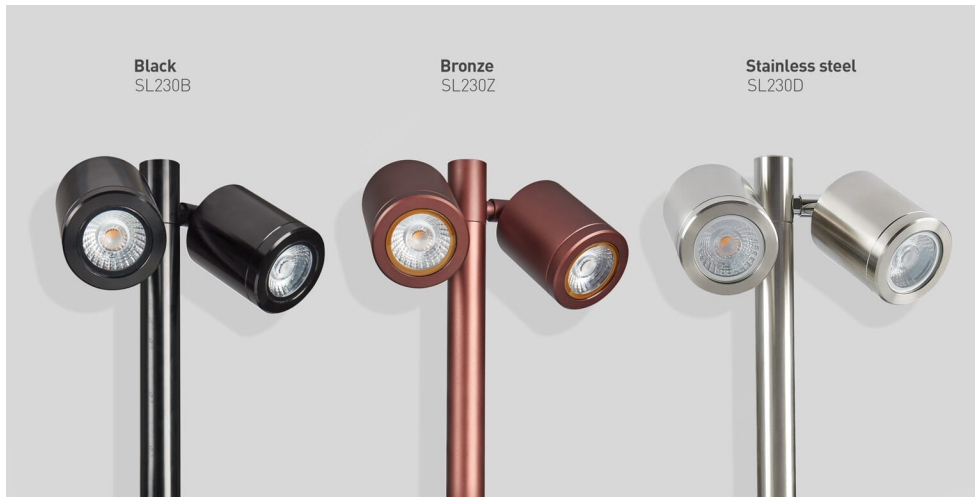

SL230 MAINS

Mains voltage LED twin pole spike light

Features

IP rating	IP65
CSP Switchable	Fixed colour
Tilttable	90°
Rotation Angle	330°
LED Lifetime	70,000h L70
CRI	80 Ra
SDCM	3 SDCM

Installation information

UK Bathroom Zone	-
Inrush Current	120A 375s
Construction Material	Anodised aluminium
Weight	SL230B: 1578g SL230D: 3500g SL230Z: 1577g
Maximum Ambient Temperature	35°C
Electric Class (1, 2, 3)	1

Photometrics @ 25°C

Product code	Finish	W	Colour	Beam	lm	lm/W	lx @ 1m
SL230ZWBM27	Bronze anodised aluminium	11.4W	2700K	40°	1030	2 x 90	2 x 1171
SL230ZWBM30	Bronze anodised aluminium	11.4W	3000K	40°	1040	2 x 91	2 x 1182
SL230ZWBM40	Bronze anodised aluminium	11.4W	4000K	40°	1060	2 x 93	2 x 1205
SL230BWM27	Black anodised aluminium	11.4W	2700K	40°	1030	2 x 90	2 x 1171
SL230BWM30	Black anodised aluminium	11.4W	3000K	40°	1040	2 x 91	2 x 1182
SL230BWM40	Black anodised aluminium	11.4W	4000K	40°	1060	2 x 93	2 x 1205
SL230DWM27	Stainless steel	11.4W	2700K	40°	1030	2 x 90	2 x 1171
SL230DWM30	Stainless steel	11.4W	3000K	40°	1040	2 x 91	2 x 1182
SL230DWM40	Stainless steel	11.4W	4000K	40°	1060	2 x 93	2 x 1205

Wiring information

Cable / Flying Lead	3m H05RN-F rubberised cable (outside diameter: 7mm)
Type of Wiring Required	Parallel

LED driver

N/A (integrated SELV driver)	220-240V	N/A	N/A	N/A	N/A	N/A
------------------------------	----------	-----	-----	-----	-----	-----

Accessories

JB5	Gel filled waterproof connector	Sold Separately
GH220	Simple hood to reduce glare whilst maintaining a good light distribution	Sold Separately
GS220	Simple hood to reduce glare whilst maintaining a good light distribution	Sold Separately



collingwood

01604 495 151
collingwoodlighting.com

collingwoodled

/collingwoodlighting

collingwoodlighting

Guarantee

7 year extended warranty available

Features & benefits

11.4W

Coastal protected

IP65 ideal for outdoor areas

Adjustable pole-mounted twin heads are perfect for illuminating paths, steps and trees

Easily ground mounted with spiked pole and single cable for quick installation

Elegant and discreet black and bronze finishes

Mains voltage for easy installation

Highly efficiency of 93lm/W

Light source energy efficiency:



Beam angle: 40°

