



collingwood

01604 495 151
collingwoodlighting.com

- collingwoodled
- /collingwoodlighting
- collingwoodlighting

Bolt-On Emergency

3 hour emergency conversion pack, corridor area, self-test

Features

IK rating	IK07
IP rating	IP65
Sensor Option	No
CRI	70 Ra
Emergency Option	Emergency Version

Installation information

Install Connector Type	Flying lead
Inrush Current	2A 2.6ms
Construction Material	PC
Weight	219g
Electric Class (1, 2, 3)	2

Wiring information

Cable / Flying Lead	1.4m (2x 0.75mm ²)
Type of Wiring Required	Parallel

USE WITH

Borealis Batten	All variants	Sold Separately
Caiman Anti Corrosive	All variants	Sold Separately
Lentus Lowbay	All variants	Sold Separately

PRODUCT CODES

	Finish	Description	Characteristic 1	Characteristic 2	Characteristic 3
EMBOLTS COR	White RAL9016	3 hour emergency conversion pack, corridor area, self-test	Non-Maintained	Corridor Lens	Self Test
EMBOLTS OPEN	White RAL9016	3 hour emergency conversion pack, open area, self-test	Non-Maintained	Open Area Lens	Self Test
EMBOLT MCOR	White RAL9016	3 hour emergency conversion pack, corridor area, manual test	Non-Maintained	Corridor Lens	Manual Test
EMBOLT MOPEN	White RAL9016	3 hour emergency conversion pack, open area, manual test	Non-Maintained	Open Area Lens	Manual Test


Guarantee

4 years guarantee of the electronics
2 years guarantee of the battery

Features & benefits

- Compatible with:
- BOREALIS Batten
- CAIMAN Anti-Corrosive
- LENTUS Lowbay
- Suitable for use at heights of 2.5 to 6.0 metres
- Fast 4-minute conversion time
- M20 interface for easy installation
- Lithium iron phosphate battery (LiFePO4)

Beam angles: 155° x 68° 145°

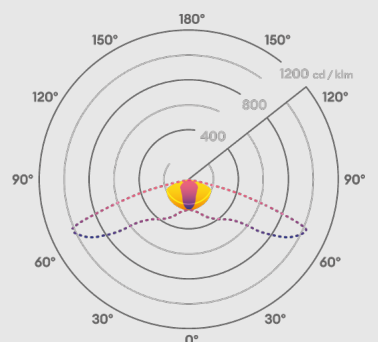

181mm

