

**erluna**



**camber fixed  
lo pro**

**circular product**



# camber fixed lo pro

# circular product

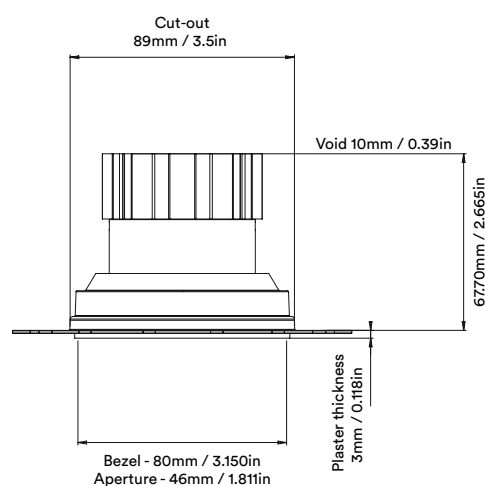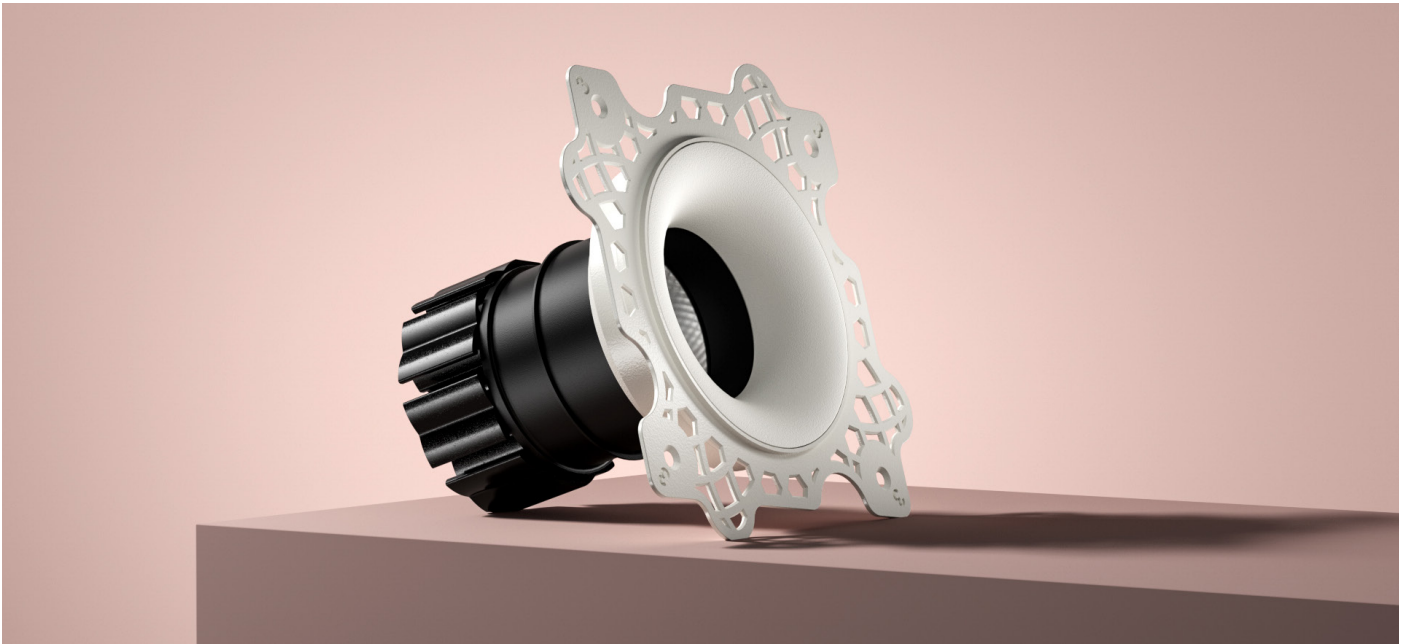

# camber fixed lo pro


# circular product

When an old Orluna light comes to the end of its life, or is faulty, instead of throwing it away, we kindly ask you to return it to us.

**1**

The fully repaired and tested product enters back into our stock – with a brand new warranty.

**3**

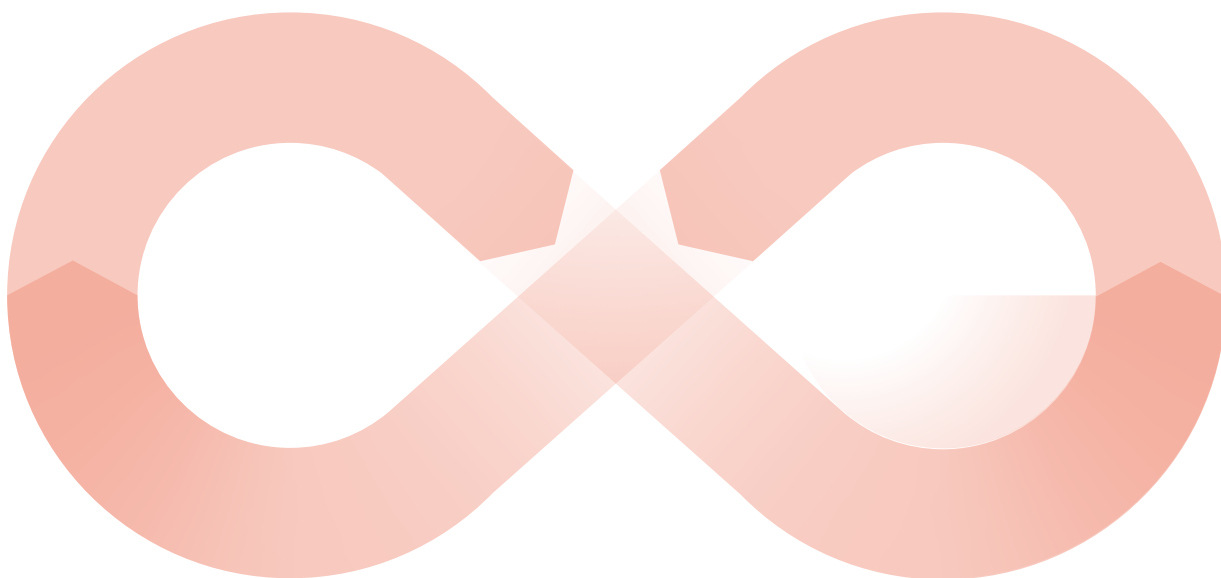


The 'new' light fitting is despatched to a new customer.

**4**

Once we've received the unwanted or faulty fitting, it's dismantled, repaired and renewed with a new LED and PCB.

**2**

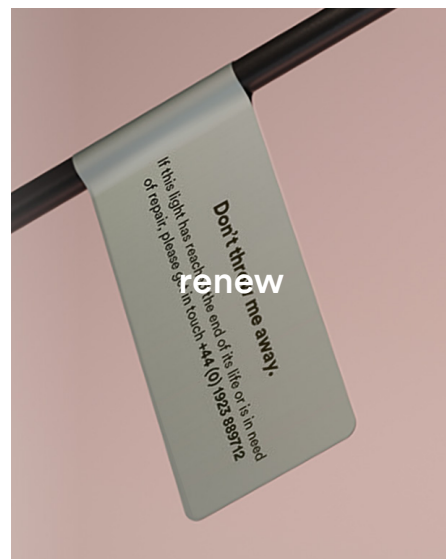

# camber fixed lo pro

# circular product

		2700K		
		SOFT		
		Narrow	Medium	Wide
LIGHT VALUES	Beam Width FWHM	18°	20°	32°
	Initial Lumens	1164	1164	1164
	Engine Lumens	895	866	868
	Luminaire Lumens	616	618	562
	Engine Lm/W	79	76	76
	Luminaire Cd	4243	3186	1286
POWER	Voltage	34V		
	Drive Current	300mA		
	Circuit Power (typ)	11.4W		

		3000K		
		SOFT		
		Narrow	Medium	Wide
LIGHT VALUES	Beam Width FWHM	18°	20°	32°
	Initial Lumens	1252	1252	1252
	Engine Lumens	913	905	903
	Luminaire Lumens	664	651	603
	Engine Lm/W	80	79	79
	Luminaire Cd	4464	3430	1371
POWER	Voltage	34V		
	Drive Current	300mA		
	Circuit Power (typ)	11.4W		

DRIVER	Binning SDCM (Hot)	2
	CRI (typ)(R9)	99 (98)
	TM30 Rf Rg	Rf 94 Rg 100
	Lifetime (TM21)	L90 B5 50,000hrs (inc driver)
	Lifetime (Calculated)	L70 426,000hrs
DRIVER	Protocols	Mains Dim / DALI / 0-10V / Non-dim
	Dim to Dark	0.1% Lux
	Distance from LED	20m / 65' (series wiring)
	Emergency	Emergency packs available

## SPECIFICATION CODE

Engine type	Bezel	Colour Temp	Driver	Beam Width	Bezel Colour	Baffle Colour	Options
<b>LO</b>	<b>-CBX-</b>	<b>27</b>	<b>M</b>	<b>N</b>	<b>-W-</b>	<b>BB</b>	<b>F 54 E</b>
		27 / 2700K 30 / 3000K 40 / 4000K	M / Mains Dim D / DALI 0 / 0-10v N / Non Dim X / No Driver	N / Narrow M / Medium W / Wide	W / White RAL 9010 D / White RAL 9003 E / White RAL 9016 B / Black RAL 9005 C / Other RAL G / Polished Brass J / Antique Bronze K / Brushed Chrome L / Polished Chrome I / Polished Copper Z / Other Metallic	BB / Black 9005 WB / White 9010 DB / White 9003 EB / White 9016 CB / Other RAL MB / Polished Brass JB / Antique Bronze KB / BrushedChrome LB / PolishedChrome IB / Polished Copper ZB / Other Metallic	F / 60 min Fire Rated Plate 54 / IP54 65 / IP65 P / Sea & Spa IP65 E / 3hr Emergency H / Honeycomb N / Frosted Lens Z / LSZH Cable K / Click Connector

31/08/22

