

Pillar Lite

Cat. No. PIL

Cat. No. PIL/R



Cat. No. PILGU




The Pillar Lite illuminates both upwards and downwards, giving columns, gateway pillars and entrances a dramatic effect. The Retro™ is a 110/240-12 ac mains option suited to an installation where mounting a transformer is a problem, e.g. a brick wall where there is only the cable protruding out of the wall and it is not an option to recess the transformer or when replacing an existing light fitting. The base size increases in size to accommodate the encapsulated IP66 dimmable transformer.

This luminaire is machined from a choice of 10mm solid aluminium with a UV stable powder coated finish, solid copper or 316 stainless steel with a clear, tempered, flush glass lens and high temperature silicon gaskets.

A GU10 version of this luminaire is also available for line voltage lamps.



Retro™



Retro™

USA/Canada

Ordering Information

Luminaire Type

PIL - Pillar Lite
 PIL/R - Pillar Lite Retro
 PILGU - Pillar Lite GU10

Material/Finish

BK - Black
 BZ - Bronze
 CT - Corten
 DG - Dark Grey
 OG - Olive Green
 STAR - Silver Star
 WB - White Birch
 WH - White
 COP - Copper
 SS - Stainless Steel

Accessories

CJK150 - Cable Joint Kit
 GG - Glare Guard
 HCL - Hex Cell Louvre
 LENSSTEPF - Frosted Lens
 WBAP - Wall Box
 Adaptor Plate

Ordering example: PIL BK - Pillar Lite in Black
 PIL/R COP - Pillar Lite Retro in Copper
 PILGU SS - Pillar Lite GU10 in
 Stainless Steel
 LENSSTEPF - Frosted Lens
 (accessories ordered separately)

HUNZA™ PURE
 OUTDOOR
 LIGHTING

HUNZA FACTORY
 130 Felton Mathew Ave
 Glen Innes
 Auckland 1072
 New Zealand

Ph: 64-9-528 9471
 Fax: 64-9-528 9361
 hunza@hunza.co.nz
 www.hunzalighting.com

INTERNATIONAL CONTACTS:
[http://www.hunzalighting.com/
 contact.php](http://www.hunzalighting.com/contact.php)
 Specification may change without notice.
 Manufactured in New Zealand.
 © 2016 Hunza Holdings Ltd.

Luminaire Construction

CNC machined from one of the following metals:

Aluminium

High corrosion resistant aluminium with chromate substrate and high UV resistant powder coat.

Body: 63.5mm (2½") x 10mm (3/8") tube.

Base: 2mm (1/16") hand spun aluminium.

Back Plate: cast from virgin high corrosion resistant CC401 low copper aluminium alloy.

Colours:

Black, Bronze, Corten, Dark Grey, Olive Green, Silver Star, White Birch, White.

Copper

Body: 63.5mm (2½") x 10mm (3/8") tube.

Base: 2mm (1/16") hand spun copper.

Back Plate: forged brass.

316 Stainless Steel

Body: 63.5mm (2½") x 10mm (3/8") tube.

Base: 2mm (1/16") hand spun stainless steel.

Back Plate: investment cast and CNC machined stainless steel.

Mounting

12 volt - the luminaire is mounted to the wall using two 316 stainless steel screws through a shallow base 16mm (5/8") in depth. A Wall Box Adaptor Plate is available as an accessory to fit 3.0 and 4.0 junction boxes for USA/Canada.

Retro - a mounting plate is fixed to the wall using two screws and then the luminaire is fixed to the mounting plate.

Features

Lens

10mm (3/8") clear flush fit shatter resistant glass.

Lifetime Warranty.

Gaskets

Silicone, iron impregnated 220°C (428°F).

Lamp Holders

MR16 & GU10 - 350°C (662°F) ceramic multi contact lamp holder with 250°C (480°F) Teflon cables.

Accessories

Cable Joint Kit (Cat. CJK150). Not approved for USA/Canada.

Glare Guard (Cat. GG).

Hex Cell Louvre (Cat. HCL).

Frosted Lens (Cat. LENSSTEPF).

Wall Box Adaptor Plate (Cat. WBAP).

For 12 volt luminaires for USA/Canada.

Standards

IP66, UL1838,

Luminaire Weight

12 volt - **Aluminium** - 0.775kg (1lb 11oz)

Copper - 2.230kg (4lb 14oz)

Stainless Steel - 1.750kg (3lb 13oz)

Retro - **Aluminium** - 1.100kg (2lb 7oz)

Copper - 2.650kg (5lb 13oz)

Stainless Steel - 2.200kg (4lb 13oz)

Power Supply

12 volt - Hunza Inground or Wall Mount Transformer: not included.

USA and Canada

Hunza Wall Mount Transformer: not included.

Approved for internal use.

Retro - Hunza 110/240 volt ac silicone encapsulated electronic transformer built into the Retro base. Dimmable with a suitable dimmer.

Approved for internal use.

Lamp Options










MR16 - 20 watt lamp max.

GU10 - 25 watt lamp max.

USA and Canada

MR16 - 20 watt lamp max.

GU10- lamp not supplied.

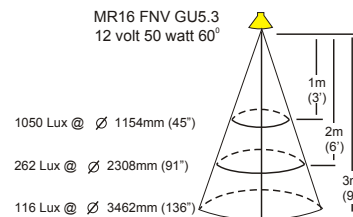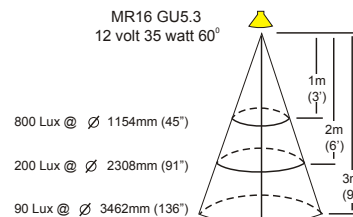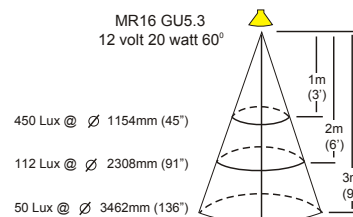

HUNZA™ PURE OUTDOOR LIGHTING

HUNZA FACTORY
130 Felton Mathew Ave
Glen Innes
Auckland 1072
New Zealand

Ph: 64-9-528 9471
Fax: 64-9-528 9361
hunza@hunza.co.nz
www.hunzalighting.com

INTERNATIONAL CONTACTS:
<http://www.hunzalighting.com/contact.php>
Specification may change without notice.
Manufactured in New Zealand.
© 2016 Hunza Holdings Ltd.